



US008950648B2

(12) **United States Patent**  
**Simmons**

(10) **Patent No.:** **US 8,950,648 B2**  
(45) **Date of Patent:** **Feb. 10, 2015**

(54) **BOX COLUMN ASSEMBLY**

(75) Inventor: **Robert J. Simmons**, Hayward, CA (US)

(73) Assignee: **ConXtech, Inc.**, Hayward, CA (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 389 days.

(21) Appl. No.: **13/459,134**

(22) Filed: **Apr. 28, 2012**

(65) **Prior Publication Data**

US 2012/0279949 A1 Nov. 8, 2012

**Related U.S. Application Data**

(60) Provisional application No. 61/483,647, filed on May 7, 2011.

(51) **Int. Cl.**

**B23K 37/00** (2006.01)  
**B23K 37/04** (2006.01)  
**B23K 37/053** (2006.01)  
**B23P 11/00** (2006.01)  
**B23B 1/00** (2006.01)  
**B25B 1/20** (2006.01)

(52) **U.S. Cl.**

CPC ..... **B23K 37/0533** (2013.01); **B23K 37/0538** (2013.01)  
USPC ..... **228/44.3**; 228/49.1; 228/49.2; 219/159; 29/822; 29/700; 29/824; 269/43

(58) **Field of Classification Search**

USPC ..... 228/44.3, 49.1, 49.2; 219/159; 29/822, 29/700, 824; 269/43

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,641,829 A 6/1953 Sasso  
3,085,148 A 4/1963 McConnell  
3,629,931 A 12/1971 Stanley  
3,653,115 A 4/1972 Perkins  
3,824,661 A 7/1974 Dobson et al.  
3,845,538 A 11/1974 Demler, Sr.  
3,845,930 A 11/1974 Metrailer  
3,848,863 A 11/1974 Owen  
3,877,129 A 4/1975 Dobson et al.

(Continued)

FOREIGN PATENT DOCUMENTS

GB 2385817 A 9/2003  
JP 61219481 A 9/1986


Primary Examiner — Erin Saad

(74) Attorney, Agent, or Firm — Kolisch Hartwell, P.C.

(57) **ABSTRACT**

Apparatus for assisting in weld assembling a box column from a tack-welded pre-assembly of planar plate components. The apparatus features (1) an elongate frame defining a rotational-assembly axis, and (2) plural pre-assembly-receiving, rotational support structures mounted at spaced locations on the frame—each support structure including (a) an openable/closable yoke possessing a collar-reception zone, (b) an openable/closable collar rotatably receivable within this reception zone, and possessing a central throughpassage having a cross-sectional configuration which is larger than that of a box-column which is to be assembled, and (c) a pair of removably-collar-attachable, throughpassage clamping shoes for forming cooperatively, within the collar throughpassage, a window for complementarily, receiving extension therethrough of a box-column pre-assembly's cross section. A so received pre-assembly is rotatable about the rotational-assembly axis to position the existing seams of adjacency between the pre-assembly plate components for full-strength welding by an automated, traveling welding instrumentality.

**12 Claims, 5 Drawing Sheets**

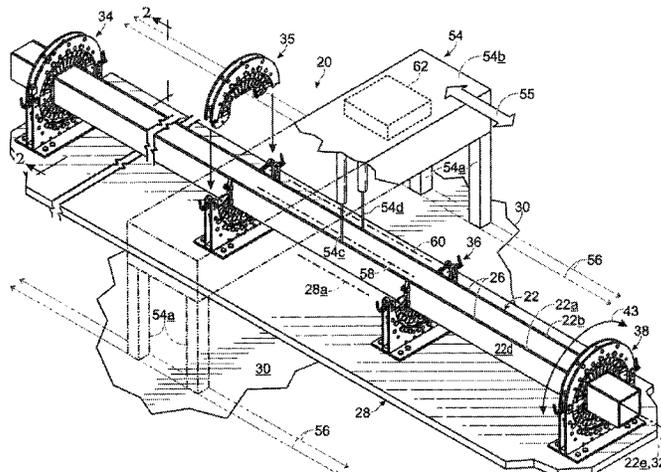



(56)




**References Cited**

## U.S. PATENT DOCUMENTS


3,940,105	A	2/1976	Metrailer	6,322,061	B1	11/2001	Maser et al.
4,014,089	A	3/1977	Sato et al.	6,367,788	B1	4/2002	Babchuk
4,131,048	A	12/1978	Dickes	6,431,535	B1	8/2002	Volpe
4,148,467	A	4/1979	Sargeant	6,837,016	B2	1/2005	Simmons et al.
4,353,154	A	10/1982	Wagner	6,921,011	B1	7/2005	Mangelsen et al.
4,480,383	A	11/1984	Yoshioka et al.	7,036,202	B2	5/2006	Lorenz
4,494,431	A	1/1985	Niswonger	7,051,917	B2	5/2006	Simmons
4,497,100	A	2/1985	Wagner	7,051,918	B2	5/2006	Simmons
4,584,918	A	4/1986	Stubbe et al.	7,076,852	B2	7/2006	Penman et al.
4,629,408	A	12/1986	Giron et al.	7,127,863	B2	10/2006	Simmons
4,893,393	A	1/1990	Marshall	7,621,099	B2	11/2009	Simmons
5,098,005	A	3/1992	Jack	7,716,820	B2	5/2010	Simmons
5,112,183	A	5/1992	Nusbaum et al.	7,837,084	B2	11/2010	Simmons
5,206,980	A	5/1993	Chapman	7,908,725	B1	3/2011	Irish et al.
5,248,078	A	9/1993	Deal et al.	2001/0017292	A1	8/2001	Belloni et al.
5,289,665	A	3/1994	Higgins	2002/0005397	A1	1/2002	Bong et al.
5,355,576	A	10/1994	Miller	2002/0083607	A1	7/2002	Atsuhiko et al.
5,727,778	A	3/1998	Nodar	2005/0055954	A1	3/2005	Simmons
RE36,541	E	2/2000	Rossi	2007/0256288	A1	11/2007	Vermaat
				2008/0245021	A1	10/2008	Simmons
				2010/0192346	A1	8/2010	Simmons
				2010/0313400	A1	12/2010	Simmons

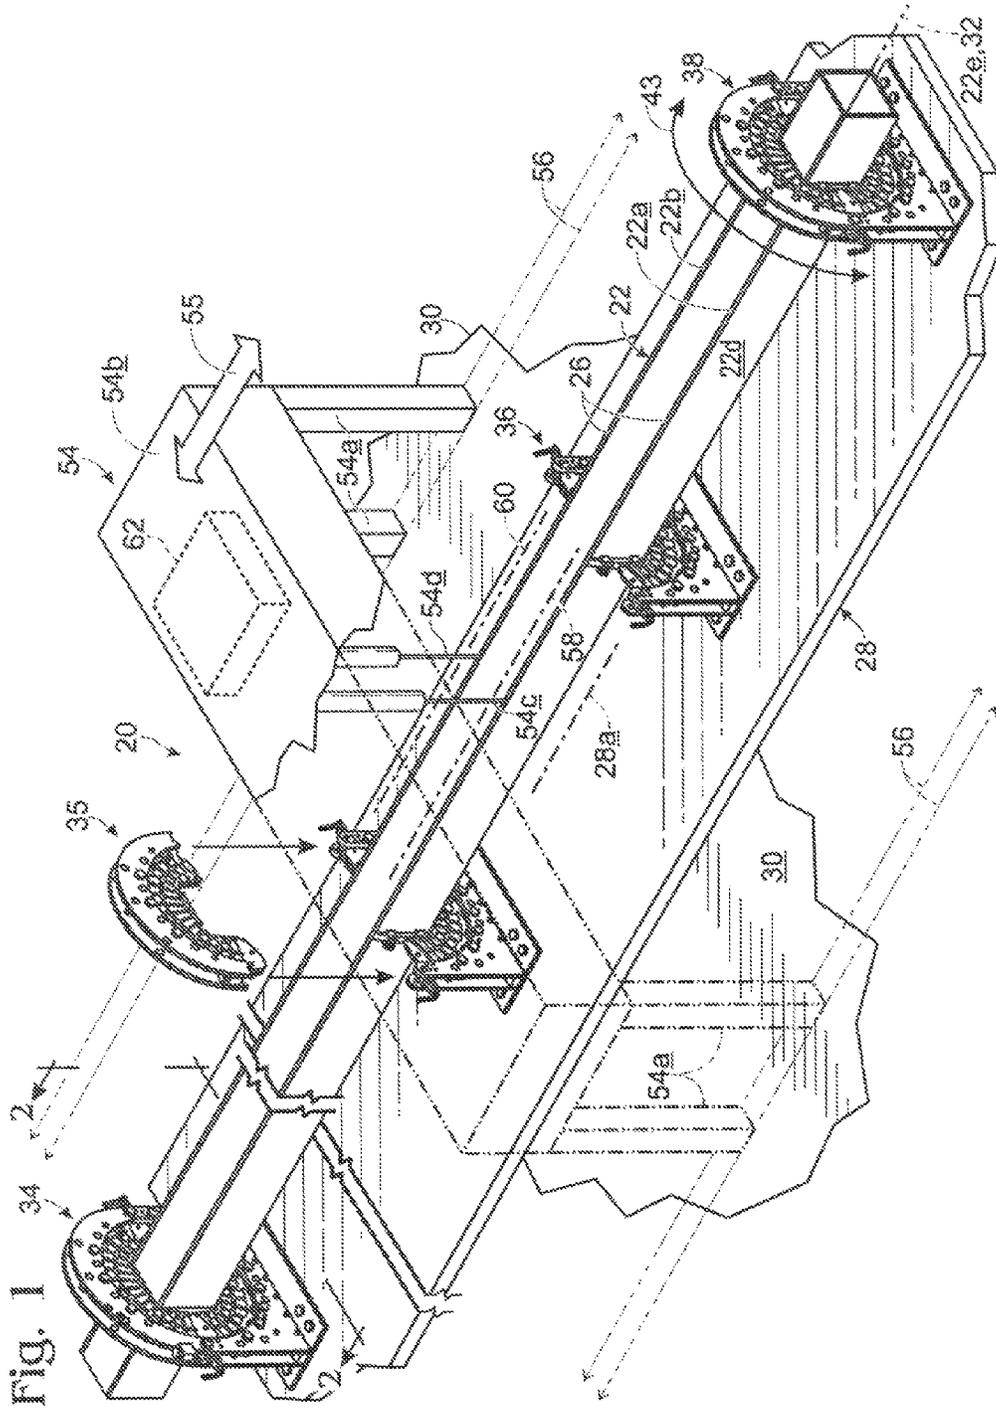

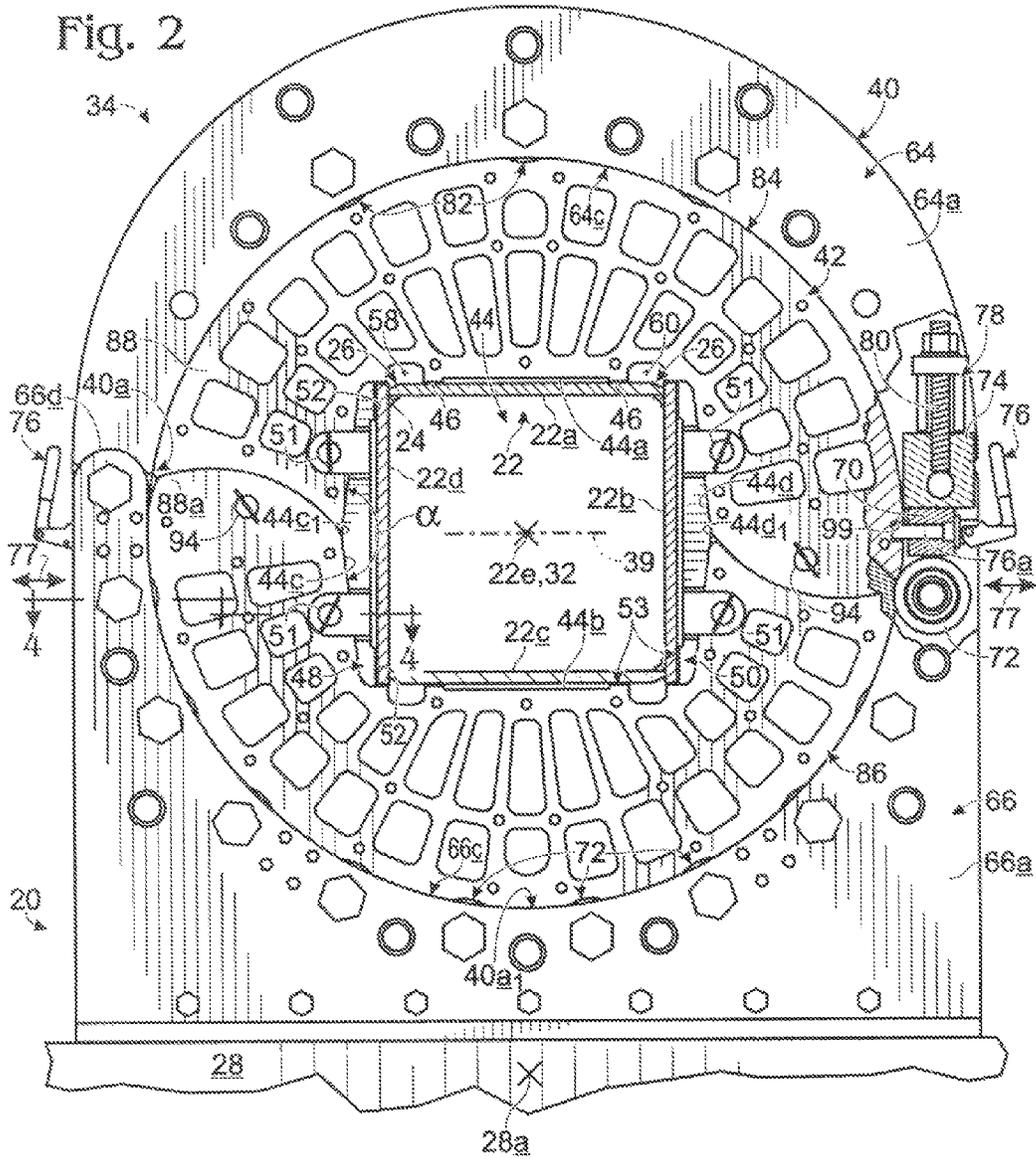

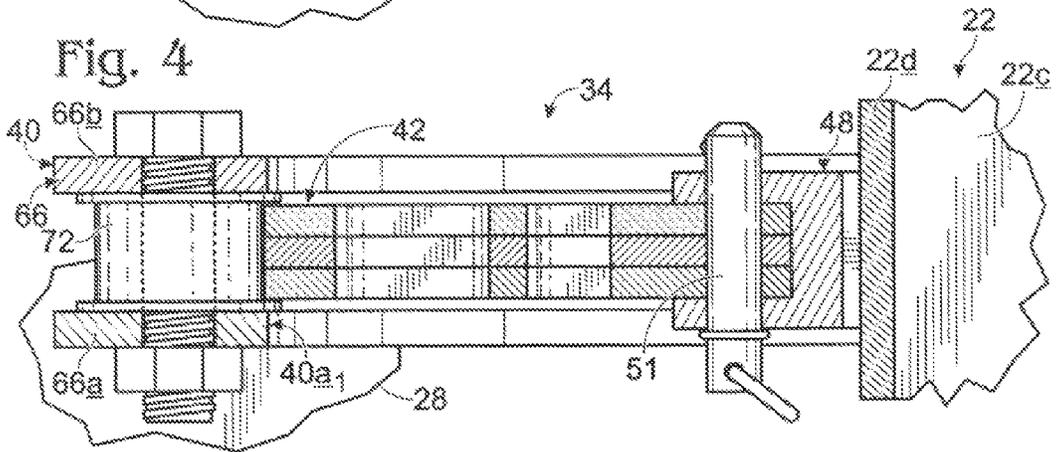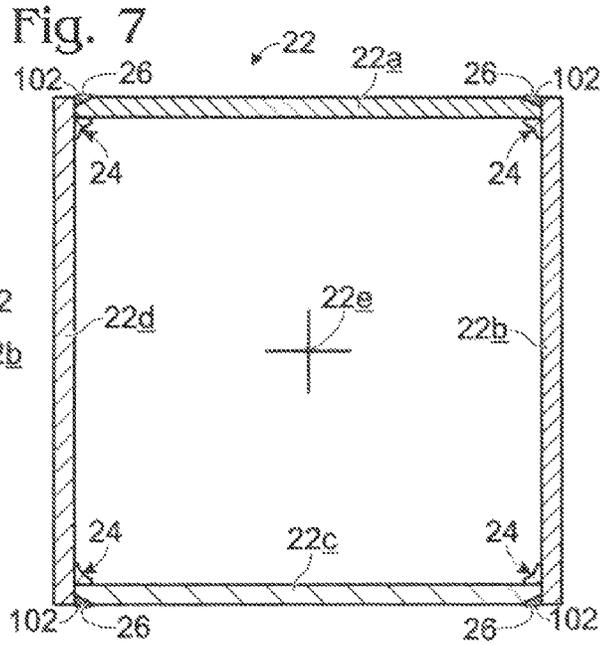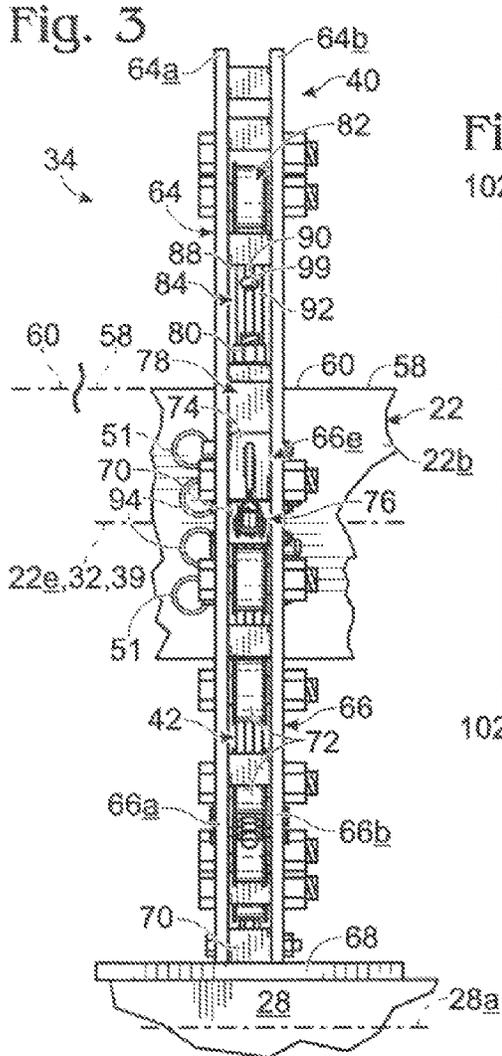



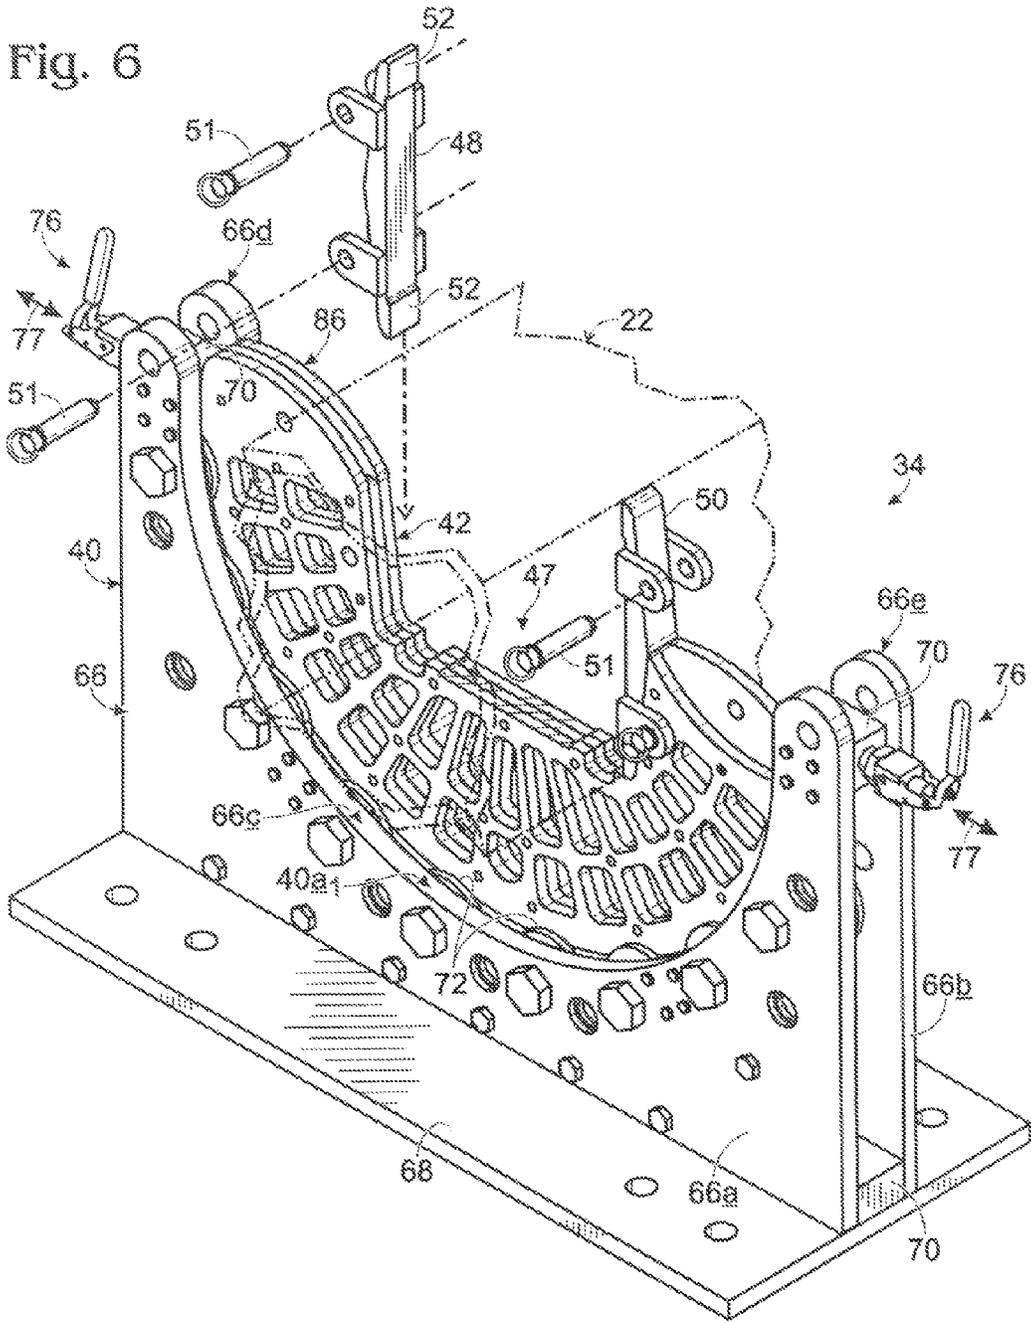

1

**BOX COLUMN ASSEMBLY**CROSS REFERENCE TO RELATED  
APPLICATION

This application claims priority to the filing date of currently copending U.S. Provisional Patent Application Ser. No. 61/483,647, filed May 7, 2011, for “Column-Component Weld-Assembly Jig Apparatus and Methodology”, the entire disclosure content in which is hereby incorporated herein by reference.

BACKGROUND AND SUMMARY OF THE  
INVENTION

This invention pertains to apparatus for assembling, by welding, from individual, elongate plate components, an elongate, hollow-form, rectangular-cross-section box column. For illustration purposes herein, a preferred and best-mode embodiment of the invention is described in conjunction with assembling a square-cross-section box column of the type intended for use in a structural building frame—an application wherein the invention has been determined to offer particular utility.

The proposed assembly apparatus receives a pre-assembly of the elongate plate components that are to be made up into such a column—for example, a preliminarily tack-welded plate-component pre-assembly, having a long, central axis—and, employing plural (at least two), specially constructed, longitudinally spaced, pre-assembly-circumsurrounding, openable/closable, rotational support closure structures, cooperatively holds this preassembly in a generally horizontal position for selective rotation to different, temporarily stabilized angular positions about its long axis for full-welding unification through robust, fill-strength, column-finishing welds that are created along the adjacent long edges of the pre-assembled components. Preferably, though not necessarily, these column-finishing welds are performed by an automated, essentially continuously traveling welding instrumentality which moves along the lengths of the preassembled plate components in a manner uniquely unimpeded, and freely accommodated, by the rotational support structures that form parts of the assembly apparatus. Travel clearance for welding-instrumentality movement successively past the rotational support closure structures is accomplished, according to the invention, by a permitted “opening” of selected portions of the closure structures—an action which is accomplished without compromising in any way configurationally stable continuous supporting of the pre-assembly components.

In such an arrangement, it is, of course, important that the pre-assembly components be supported with assured configurational stability during the full-welding-assembly procedure. It is also important that these components, in their pre-assembled form, and during welding, (a) be rotatable as a unit about what will become, when full welding assembly is completed, and what already effectively is in the component pre-assembly condition, the resulting assembled-column’s long axis, so as to accommodate the easy forming and development of the required elongate, inter-component welds along the entire length of the pre-assembly, and (b) be supported in a manner which permits an automatic, or hand-operated, traveling welding instrumentality to move, preferably with non-stop continuity, past the rotational support closure structures which support the preassembled compo-

2

nents during the process. Such rotation during welding helps, inter alia, to balance and minimize potential heat-induced warping distortion.

In order to enable the practice of accommodating non-stop continuity welding, the rotational support closure structures are specially formed so as to be selectively partially openable without disturbing the required maintenance of the stable positional relationships that have been established between the pre-assembly components.

In this context, and from one point of view of the invention, its proposed apparatus features (1) an elongate, substantially horizontal frame possessing a substantially horizontal, rotational-assembly axis, (2) at least a pair of box-column pre-assembly rotational support structures, or rotational support closure structures, mounted at spaced locations on the frame, designed to receive, and to furnish support for rotation about the rotational-assembly axis for, such a pre-assembly. Each support structure includes, in respective conditions operatively centered on the apparatus’ rotational-assembly axis, (a) an openable/closable, dual-section yoke defining an openable/closable, generally circular, collar-reception zone which, with the yoke closed, is circular in configuration, (b) an openable/closable, dual-section collar, which is circular in perimetral outline when closed, and removably receivable, and rotatable effectively, within the yoke’s circular collar-reception zone, this collar, when closed, possessing a central, non-rectangular throughpassage which is defined by a first pair of opposite, straight-angle sides, and a second pair of opposite, outwardly-directed obtuse-angle sides, opening of the collar splitting, and opening up, its throughpassage, along a line connecting the vertices of its obtuse-angle sides, into two, equal and matching-configuration, wedge-shaped troughs, and (c) a pair of removably collar-attachable, double-wedge clamping shoes, one for each obtuse-angle side of the throughpassage, these shoes, when attached to the collar, and with the collar closed, forming, in cooperation with the collar’s throughpassage’s straight-angle sides, a rectangular-outline window for confined, and complementarily, receiving extension therethrough of the rectangular-cross-section of a box-column pre-assembly in a condition with the pre-assembly’s long, central axis substantially coincident with the apparatus’ rotational-assembly axis.

This apparatus is designed specifically to handle such a pre-assembly of plate components having, in the pre-assembly, long, lateral, parallel, edges that define, collectively, plural, elongate, parallel, inter-plate-component, weld-awaiting interface seams, or valleys, and the yokes and collars are respectively configured whereby opening thereof is effective to expose, in a manner facing upwardly to accommodate welding access, a pair of such seams. As will be seen, each section in each dual-section yoke possesses at least a portion which is generally arcuate and semicircular in configuration, and in fact one of the two sections in each yoke is essentially entirely arcuate and semicircular in overall configuration. Somewhat similarly, each of the two sections in each dual-section collar is essentially entirely arcuate and semicircular in overall configuration. Further, each yoke and collar is structured to promote, during box-column assembling, cooperative openings thereof about, or very near, a particular, substantially horizontal plane disposed above the underlying frame.

Operatively associated with, and straddling, the frame in the apparatus of the invention is a basically conventional, traveling welding instrumentality having a pair of laterally spaced welding heads disposed appropriately above the frame, and an elongate track supporting the welding instrumentality for movement along a travel path paralleling the

3

apparatus-included rotational-assembly axis, and for thereby guiding the welding heads along laterally spaced welding paths that are disposed, respectively, immediately overhead, and parallel to, any open-yoke and open-collar, upwardly exposed interface seams in any pre-assembly then supported by the rotational support structures.

These and other features and advantages that are offered by the invention will become more fully apparent as the detailed description thereof which follows below is read in conjunction with the accompanying drawings.

### DESCRIPTIONS OF THE DRAWINGS

FIG. 1 is an isometric view, fragmentary in nature, generally illustrating the apparatus of the present invention designed for promoting the weld assembling of an elongate, structural-building-frame box column from a pre-assembly of elongate, adjacent, planar plate components. This figure includes an illustration of a typical, square-cross-section box-column pre-assembly stably supported in place in the apparatus.

FIG. 2 is a fragmentary, enlarged-scale, view, taken generally along the lines 2-2 in FIG. 1, showing certain details of a rotational support structure constructed in accordance with the present invention to include, as will be described below, (a) an openable/closable, dual-section, split-structure yoke, (b) an openable/closable, dual-section, split-structure, rotatable collar received for rotation within the yoke, and a pair of removably-collar-attachable, double-wedge, centrally located, laterally spaced clamping shoes. A portion of the structure shown in this figure has been broken away to illustrate certain aspects of internal construction.

This drawing figure also illustrates, in an axial, cross-sectional view, the same elongate, square-cross-section, box-column pre-assembly which is shown in FIG. 1 received within a generally complementarily shaped window—i.e., a window whose perimetral outline is, effectively, complementary with respect to the cross-sectional configuration of the illustrated box-column pre-assembly—this window being formed/defined in the pictured rotational support structure by structural and configurational collaboration between the illustrated collar and clamping shoes.

FIG. 3 is a same-scale, fragmentary side elevation taken generally from the right side of FIG. 2.

FIG. 4 is a downward looking, cross-sectional view taken generally along the lines 4-4 in FIG. 2, drawn on a somewhat larger scale than that used in FIG. 2.

FIG. 5, which is drawn on a scale that is slightly smaller than the scale employed in FIGS. 2 and 3, is an exploded, isometric view of the rotational support structure illustrated in FIGS. 2-4, inclusive, presented in a condition isolated and removed from the frame in the apparatus of the invention. In this exploded view, a yoke and a collar in the pictured rotational support structure are shown in open conditions, i.e., with their respective upper and lower, selectively separable sections seen vertically separated.

FIG. 6, on a slightly larger scale, is somewhat similar to the lower portion of FIG. 5, here presenting a partial view of the rotational support structure of FIGS. 2-5, inclusive, with one clamping shoe shown in place relative both to the lower section of the illustrated collar, and to the box-column pre-assembly mentioned above (here shown fragmentarily in dash-double-dot lines), much as that shoe is pictured in FIG. 2, and the other clamping shoe shown about to be put similarly into place.

FIG. 7 is a large-scale endo, long-axial view illustrating one form (i.e., the same form as is illustrated in FIGS. 1-3,

4

inclusive) of a completed, i.e., fully and finally weld-assembled, structural-building-frame box column which has been assembled utilizing the apparatus of FIGS. 1-6, inclusive. This illustration specifically relates to the box-column pre-assembly shown in FIG. 2.

### DETAILED DESCRIPTION OF THE INVENTION

Turning now to the drawings, and referring first of all to FIG. 1, indicated generally at 20 is a preferred-embodiment, and best-mode form, of an apparatus constructed in accordance with the present invention for promoting the weld-assembling of an elongate, structural-building-frame box column from a rectangular-cross-section pre-assembly of elongate, adjacent, planar plate components. While apparatus 20 may be employed for the weld-assembling of structural-building-frame box columns having different kinds of rectangular cross sections, apparatus 20 herein is illustrated and described specifically for weld-assembling a box column having a square cross section.

Adding attention for a moment to FIGS. 2 and 3 along with FIG. 1, an illustrative box-column pre-assembly of what are referred to herein as elongate, adjacent, planar plate components is shown generally at 22. It includes four, substantially equal-size plate components 22a, 22b, 22c, 22d which, in pre-assembly 22, have been tack-welded into an appropriate, square-cross-section (also referred to generally as a rectangular-cross-section), box-column configuration through a plurality of small, internal tack-welded blocks, such as those shown at 24 in FIG. 2. Pre-assembly 22 includes a long, central axis 22e which is to become, eventually, the long, central axis of a finally assembled box column fabricated in accordance with practice of the invention utilizing apparatus 20. Pre-assembly 22 herein has a length of about 60-feet, and equal lateral dimensions, determined by the widths of the four, included plate components, of about 16-inches.

The plate components which make up pre-assembly 22 have laterally spaced, elongate, lateral edges, pairs of which, respecting right-angularly-adjacent plate components in the pre-assembly, lie parallel to and immediately adjacent one another to define, collectively in the pre-assembly, what are referred to herein as plural, elongate, parallel, inter-plate-component, weld-awaiting interface seams which take the form of elongate, weld-awaiting valleys, such as the two valleys shown generally at 26 in FIG. 2. As can be seen particularly well in the axial view of the pre-assembly presented in FIG. 2, these valleys exist by virtue of the existences of the chamfered lateral edges that are provided in plate components 22a, 22c. As will become apparent, in the employment of apparatus 20 during final full welding-assembly of a box column, adjacent pairs of these seams, such as the two seams that are specifically labeled 26 in FIG. 2, and as will be explained below herein, are preferably simultaneously welded. The terms “seam” and “valley” will be employed hereinafter interchangeably.

While a specific box-column pre-assembly, formed by a particular approach to tack-welding, is illustrated, and has just been described, herein, it should be understood that any appropriate form of generally stabilized pre-assembly formation modality is certainly employable. It should also be understood that different box-column sizes may readily be fabricated in accordance with the present invention simply by changing certain obvious structural parameters present in apparatus 20. For example, a box column which has a rectangular, but not-square, cross section may easily be fabricated. The detailed apparatus-componentary description

which follows below will make readily evident to those skilled in the art just how to accommodate box-column size and configuration variations.

Apparatus **20** includes an elongate, substantially horizontal frame **28**, of suitable design, which is appropriately supported on, for example anchored to, the floor of a factory, such as the factory floor which is shown fragmentarily at **30** in FIG. **1**. Frame **28**, whose details may be conventional, and not specifically important in relation to the invented features of apparatus **20**, possesses a long, substantially horizontal axis **28a**. While different, specific length-accommodating aspects of apparatus **20** are, of course, possible, at least in terms of the length of frame **28**, in the apparatus now being described, frame **28** has an overall length of somewhat more than about 60-feet, and repositionably mounted on it are eight rotational support structures, only four of which are pictured herein in FIG. **1**, spaced apart by about 8-foot intervals.

Importantly, and operatively, associated in apparatus **20** with, and disposed above, frame **28** is an elongate, substantially horizontal, rotational-assembly axis **32** which parallels frame axis **28a**. It is in relation to axis **32** in apparatus **20**, an axis which is effectively defined collaboratively by plural rotational support structures (and specifically by these structures' yokes and yokes-carried rotational collars) described immediately below, that rotational weld-assembling of a box column, from a box-column pre-assembly, such as from pre-assembly **22**, is performed. It for this reason that, in FIGS. **1-3**, inclusive, axes **22e**, **32** are shown as being coincident.

Continuing with attention directed especially to FIGS. **1, 2** and **3**, included in apparatus **20** are plural—at least two—rotational support structures (or rotational support closure structures as just mentioned above), such as the four such structures shown at **34, 35, 36, 38**, which are repositionably mounted in any suitable manner on, and distributed in spaced relationship along, and extending upwardly from, frame **28**. Structures **34, 38** are shown with their included yoke and collar structures (soon to be described) in closed conditions stably supporting pre-assembly **22**. Structure **35** is shown in an open condition with all of its components visible in FIG. **1**, i.e., in a condition about to be closed, or in a condition having just been opened. Structure **36** is shown in an open condition with its upper components removed from FIG. **1**—a condition relevant to its preparing to accept for support a box-column pre-assembly, or to release and permit removal of a full-weld-completed box column. As mentioned, these rotational support structures define rotational-assembly axis **32**.

The repositionability of these rotational support structures, which herein are spaced apart representationally by the above-mentioned distance of about 8-feet, is relevant to allowing one using apparatus **20** to locate these structures at what are considered by that user to be the most appropriate, box-column pre-assembly support locations for a box-column assembly procedure (still to be described). It will be understood that, while at least two of these rotational support structures will be required for any box-column assembly operation, any appropriate number greater than two, as determined by the apparatus user, may be employed. The 8-foot spacings just mentioned above between structures **34, 35, 36, 38** are merely illustrative herein. Other specific spacings, including dissimilar, successive spacings, may be determined to be more suitable for certain assembly procedures. The 8-foot spacings present in apparatus **20** are quite suitable to the box-column assembly modality which will be described shortly. Repositionable mounting on frame **28** for the rotational support structures is accommodated readily by (a) the conventional furnishing of appropriately, longitudinally distributed mounting locations in frame **28**, and (b) by the avail-

ability of appropriate “matching” mounting “sites”, such as throughbores, that are provided adjacent the bases of the rotational support structures.

These rotational support structures, with their several included components which will be described in greater detail shortly, play the role of supporting an elongate box-column pre-assembly in a stably supported condition, and for selected rotation about rotational-assembly axis **32** in a manner holding a plate-component pre-assembly in proper, selected, rotated orientations to allow for ready and convenient full-strength welding to take place, preferably in a longitudinally continuous manner, along the length of the pre-assembly respecting the seams between adjacent plate components. As will become apparent, and as will shortly be more fully explained, these rotational support structures are openable/closable structures, upper portions of the respective componentry sections (dual sections) in which may be removed and lifted relative to, and effectively and just generally about, a substantially horizontal plane **39** (see FIGS. **2** and **3**), by lifting and removal to expose what is then the then upper side of a there-supported box-column pre-assembly for clear and unobstructed movement, preferably continuously, of a pair of welding heads along the pre-assembly, without there occurring any interference of such motion from any portion of a rotational support structure. As can be seen in FIGS. **2** and **3**, plane **39** is shown effectively containing illustrated axes **22e**, **32**.

Generally speaking, included in each rotational support structure, such as within representative rotational support structure **34** which is pictured in detail in FIGS. **2-6**, inclusive, and recognizing that the several, illustrated rotational support structures are identical in construction, are what is referred to as an openable/closable, dual-section, split-structure yoke, or yoke assembly, **40**, and, received and supported rotatably within a circular, collar-reception zone **40a** in this yoke (see especially FIGS. **2** and **5**), for selective, reversible rotation within that zone about rotational-assembly axis **32**, is what is referred to herein as an openable/closable, dual-section, split-structure collar, or collar assembly, **42** which is circular in perimetral outline to fit rotatably properly within circular yoke zone **40a**. Selective, reversible rotation of the collars, such as collar **42**, is illustrated by double-headed, curved arrow **43** in FIG. **1**.

Still speaking in somewhat general terms, each collar, such as collar **42**, when in its closed condition (as is illustrated especially well in FIG. **2** for collar **42**), possesses, importantly, a central, non-square, non-rectangular throughpassage, such as throughpassage **44** which is indicated in FIG. **2**—this throughpassage being defined by (a) what are referred to herein as opposed (and facing one another), spaced, substantially parallel, straight-angle sides, such as sides **44a**, **44b**, and by (b) a pair of spaced (and facing one another), opposed, obtuse-angle sides, such as sides **44c**, **44d**.

The two obtuse-angle sides **44c**, **44d** in throughpassage **44**, each possessing a “central” obtuse angle  $\alpha$  of about 170-degrees, are referred to herein as being outwardly directed, for the reason that the angular apices in these two sides, which apices are shown at **44c<sub>1</sub>**, **44d<sub>1</sub>**, respectively, in FIG. **2**, point in opposite directions, laterally outwardly and away from the throughpassage. It will be noticed particularly FIG. **2** that, in the specific conditions shown therein for the componentry in rotational support structure **34**, these two, obtuse-angle-side apices essentially lie within previously mentioned plane **39**—a fabrication (full welding)-relevant condition which is helpful, as will become apparent, during employment of apparatus **20** in the implementation of full-welding assembly of a box column from a box-column pre-assembly, and very

specifically under circumstances where, as appropriate and required, the relevant rotational support structure has been opened relative to plane 39 to allow for unimpeded welding-head travel past the location of that rotational support structure. As will also become apparent, and as can be seen clearly in FIG. 2, there are two rotated (about axis 32) conditions, 180-degrees apart, wherein this same, apices-positional “condition” exists.

With regard to the sizing illustrated in FIG. 2 for a through-passage 44 herein, it will be observed that the spacing which exists between throughpassage, straight-angle sides 44a, 44b, and more specifically the spacing which exists between the small, opposing-facing (i.e., opposing from opposite sides 44a, 44b), flat-surfaces that are present in the slight, island-like projections included adjacent opposite lateral ends in those sides, two of such “same-side” projections being shown at 46 in throughpassage side 44a, under circumstances with collar 42 closed as shown, is essentially the same as the intended cross-sectional lateral dimension of a received box-column pre-assembly, such as that of pre-assembly 22. The opposing projections 46 which are formed on the two sections (upper and lower as illustrated in the drawings herein) in the collars, such as in collar 42, apply a slight stabilizing clamping pressure on opposite sides of a received pre-assembly.

By way of contrast, however, the spacing which exists between the two obtuse-angle sides of a throughpassage, as can be seen for sides 44c, 44d in throughpassage 44 in FIG. 2, is considerably greater than the intended cross-sectional lateral dimension of a received box-column pre-assembly, such as pre-assembly 22. The reason for this is to allow for easy insertion for processing of a box-column pre-assembly, and for later easy removal of a finished box column. In connection with this consideration regarding placement and removal of box-column componentry—both pre-assembly, and finished—within the throughpassages furnished in the collars received within the rotational support structures, those collar portions of each throughpassage which lie respectively on opposite sides of a line, or plane, passing through the apices in the obtuse-angle sides of the throughpassages are referred to herein as wedge-shaped troughs 47 (see particularly FIGS. 5 and 6).

Further included in each rotational support structure, such as within rotational support structure 34, are two collar-attachable, double-wedge clamping shoes, such as the two such shoes shown variously at 48, 50 in FIGS. 2, 4, 5 and 6. As can be seen in FIGS. 2-6, inclusive, these two clamping shoes, which are shown variously in these figures in conditions both releasably pinned, and releasably pinable, by manually manipulable detent pins 51, appropriately to the two sections still to be described in collar 42, include outer sides which are formed with essentially the same obtuse-angle shape which is been described above existing in throughpassage sides 44c, 44d, and inner, spaced, inwardly facing straight-angle sides, adjacent opposite lateral ends of which are formed small, flat-surfaced, island-like projections, such as the projections shown in FIGS. 5 and 6 at 52 in shoe 48. With shoes, such as shoes 48, 50, in conditions collar-attached, as shown in FIGS. 2 and 4, it will be evident that these clamping shoes effectively create, cooperatively with throughpassage straight-angle sides 44a, 44b, a generally square-cross-section, i.e., rectangular-outline, window (a corner of which is indicated by two, arrow-headed lines at 53 in FIG. 2) which, because of the presences of projections 46, 52, closes generally complementarily and confinedly around the cross-sectional configuration of a throughpassage-received box-column pre-assembly, such as pre-assembly 22.

Completing now a general, overall description of apparatus 20, included in the particular form and embodiment of this apparatus which is illustrated and described herein is an appropriately motor-driven, frame-28-straddling, traveling welding instrumentality which is shown generally in block form at 54 in FIG. 1. Instrumentality 54 which, as mentioned above, is generally conventional in construction, includes appropriate, vertical, leg-support structure 54a which supports its main body 54b immediately overhead frame 28 and above the rotational support structures mounted on that frame. Leg-support structure 54a specifically supports the entire welding instrumentality for movement reversibly (as indicated by a broad, double-headed arrow 55) along the length of frame 28 on suitable, elongate, frame-adjacent, linear tracks, or trackage, which tracks are represented schematically, and fragmentarily, by paired, dash—double-dot lines 56 in FIG. 1, and which tracks parallel frame axis 28a. Appropriate, and entirely conventional, track-traveling-and-engaging structure, such as non-illustrated wheels, is furnished appropriately adjacent the base of the leg-support structure to engage and ride on and along tracks 56.

Welding instrumentality 54 includes a pair of laterally spaced, conventional welding heads shown schematically at 54c, 54d in FIG. 1. Heads 54c, 54d are downwardly directed, and occupy vertical dispositions in the instrumentality, whereby their operational welding “ends” follow, and travel along, with movement the instrumentality, the two, laterally spaced paths shown by small cross marks 58, 60, respectively in FIG. 2, and by similarly labeled, dash-dot lines, respectively, in FIGS. 1 and 3. Paths 58, 60 extend overhead the rotational support structures, paralleling previously mentioned apparatus-associated axes 28a, 32, and specifically extend in elongate locations permitting full-assembly welding along upwardly exposed, adjacent-plate-component weld-awaiting interface seams, such as the previously mentioned seams 26 pictured in FIG. 2.

As was mentioned earlier herein, preferably, though not necessarily, substantially fully automated welding is performed in apparatus 20 during box-column assembly, and in conjunction with this preference, welding instrumentality 54 is operated principally under the control of a suitably algorithmically programmed, on-board digital computer, such as that which is represented in FIG. 1, schematically in dashed-outline block form, at 62. It should be understood, in this context of welding implementation, that, while automated-computer-controlled welding is a preference, a traveling welding instrumentality somewhat like instrumentality 54 could be employed in a manner operated by manual, rather than by computer, control, and further, that welding could also be performed, if desired, entirely by a hand-welding operation. Naturally, when computer automated welding is initiated utilizing instrumentality 54, appropriate ones, in an appropriate “succession order”, of the rotational support assemblies are opened to allow for continuous-action welding clearance and access to a supported box-column pre-assembly. In apparatus 20 as it is illustrated herein, such opening of the rotational support structures is performed as a manual operation.

Directing attention now to FIGS. 2-6, inclusive, and considering the specific, preferred constructions of the various components that make up the rotational support structures, such as rotational support structure 34, these several figures essentially show, in great detail, and without requiring much companion descriptive text in order fully to inform those who are skilled in the relevant art how to build such a structure, both (a) the individual, preferred details of the constructions of the yoke, the collar and the clamping shoes in this support

structure, and as well (b), tangentially associated other structural features that are operative collaboratively in each support structure.

With specific reference to rotational support structure **34**, and beginning with a further discussion about yoke **40** which is structurally fully representative of the yokes included in each of the other rotational support structures, yoke **40** which, as was already mentioned, is a dual-section, split-structure assembly, possesses upper and lower sections **64**, **66**, respectively. Lower section **66**, which includes, anchored to and rising from a horizontal foot plate **68**, two, spaced, confronting and substantially matching-configuration plates **66a**, **66b**, effectively constitutes the base of yoke **40**. The earlier-mentioned, generally arcuate and semicircular portion of lower yoke section **66** is very evident, and is marked at **66c** in FIGS. **2**, **5** and **6**. Foot plate **68** in lower, base section **66** accommodates repositionable mounting of yoke **40**, as desired, on apparatus frame **28**.

Disposed appropriately between plates **66a**, **66b** are suitable spacer blocks, such as the blocks shown at **70** in FIGS. **2**, **3**, **5** and **6**, and conventionally journaled for free rotation about respective horizontal axes on trans-plate-extending axles that extend between plates **66a**, **66b** are plural, flanged, idler rollers, such as rollers **72**, that are distributed along the arcuate portion of section **66**, as shown. The rotational axes furnished for these idler rollers parallel previously mentioned axes **28a**, **32** when yoke **40** is appropriately mounted on frame **28**. The flanges in rollers **72** effectively longitudinally “receive and capture” the perimetral edge of collar **42** when that collar is received, and resides for rotation, within the collar-reception zone, **40a**, in yoke **40**, and rollers **72** in lower yoke section **66** serve to define the lower, semicircular half **40a<sub>1</sub>** of reception zone **40a** (see FIGS. **2** and **4-6**, inclusive).

It will be apparent that a collar, such as collar **42**, when closed and received simply within this just-mentioned lower half of the collar-reception zone in yoke **40**, even with the yoke in an open condition, such as is illustrated in FIGS. **5** and **6** for the yoke, will be seated appropriately on rollers **72** in a manner permitting, if and when desired, free rotation of the collar on those rollers about rotational-assembly axis **32**.

The two, laterally spaced, upwardly extending reaches **66d**, **66e** of the arcuate portion of lower yoke section **66** are through-apertured, as shown, to enable nut-and-bolt attachment thereto, between plates **66a**, **66b**, of a pair of laterally spaced, suitably, matchingly apertured blocks **74** (see FIGS. **2** and **5**) which are used, as will be explained between yoke sections **64**, **66**, to accommodate bolted detachable attachment of upper yoke section **64** to lower yoke section **66**. It is this bolt-attachment/detachment structure which is thus employed to enable selective opening and closing of a yoke, such as yoke **40**. While such separating of the upper and lower yoke sections in order to accommodate opening and closing of the yoke is said to take place relative to and about previously mentioned horizontal plane **39**, the upper and lower yoke sections, in the specific structural yoke configuration which is now being described, actually separate along a line or plane which is very closely adjacent (slightly above), but not necessarily absolutely coincident with, plane **39**.

Functionally associated with lower yoke section **66**, on opposite lateral sides of that section, and in further association with the upper, two, illustrated blocks **70**, are lever-actuated, construction-evident, in-and-out anti-collar-rotation latch-pin structures **76** which are suitably mounted in place with respect to these just-mentioned, two, upper blocks **70** to enable the selective driving in and pulling out of included, elongate, cylindrical, axially shiftable latch pins **76a** which, under manual control, shift, reversibly as illus-

trated by double-headed arrows **77**, into and out of appropriate receiving bores (shortly to be described) that are distributed angularly (herein at **45-degree** angular spacings) about the perimeter of collar **42** to enable selective locking (latching), against rotation, of that collar in different angular dispositions about axis **32**, and, of course unlatching when desired.

Upper yoke section **64** includes two, spaced, confronting and substantially matching-configuration plates **64a**, **64b** which are essentially entirely arcuate and semicircular in configuration, thus giving this upper yoke section its mentioned, generally arcuate and semicircular configuration which is shown generally at **64c** in FIGS. **2** and **5**. Suitable, upper, spacer block assemblies, such as the two such block assemblies shown at **78** in FIGS. **2**, **3** and **5**, are appropriately disposed between plates **64a**, **64b**, and these block assemblies, **78**, cooperate with previously mentioned blocks **74** in lower yoke section **66**, and with vertically oriented bolts, such as those shown at **80**, to enable opening and closing of yoke **40** via appropriate attachment and detachment of upper yoke section **64** relative to lower yoke section **66**.

Conventionally journaled for free rotation about respective horizontal axes on trans-plate-extending axles that extend between plates **64a**, **64b** are plural, flanged, idler rollers, such as rollers **82**, that are distributed along the arcuate configuration of section **64** as shown. The rotational axes furnished for these upper-yoke-section rollers parallel previously mentioned axes **28a**, **32** when yoke **40** is closed and appropriately mounted on frame **28**. The flanges in rollers **82** effectively longitudinally “receive and capture” the perimetral edge of collar **42** when that collar is received, and resides for rotation, within collar-reception zone **40a** in yoke **40**, and these rollers, **82**, in the upper yoke section serve to define the upper, semicircular half **40a<sub>2</sub>** of circular collar-reception zone **40a**.

Continuing with a description of rotational support structure **34**, dual-section, split-structure collar **42** includes upper and lower sections **84**, **86**, respectively. Uses herein of the terms “upper” and “lower” in relation to collar **42** are uses that pertain to the particular, angular, rotational dispositions of collar **42**, and of the other collars, as it (and they) are specifically pictured representationally in the drawings. As can clearly be seen in the relevant drawings, each of these collar sections, which sections are essentially identical in construction, has a generally arcuate and semicircular configuration, and is formed of three, identical, suitably face-to-face joined plates, such as plates **88**, **90**, **92** which are reference-numeral-marked in upper collar section **84** in FIG. **5**. As can also be seen, one end of each of these plates has a generally concave edge profile, such as the illustrative concave edge profile shown at **88a** in FIG. **5** for plate **88**, and the opposite end, a generally convex edge profile, such as the convex edge profile shown at **88b** also in FIG. **5** for plate **88**. The plates are assembled into the two collar sections in such a manner that central plate **90** is reversed, end-to-end, in orientation relative to the two outer plates, **88**, **92**. A result of this end-to-end, reversal arrangement is that the opposite ends of the collar-section assemblies of plates exist with one end effectively including a slot between the ends of the outer, two plates, and the other end effectively including a projecting, central-plate-end tab, which, as can be seen clearly in the exploded view presented in FIG. **5**, allows for tab and slot end-to-end-fitment uniting of the upper and lower collar sections to close the collar. Conventional, manually manipulable detent pins **94** (see FIGS. **2** and **3**) cooperate with suitable accommodating throughbores in the collar sections, such as the throughbores shown at **96** (see FIG. **5**), to enable coupling and decoupling of the two collar sections.

## 11

Formed, as by drilling, radially into the perimeter of collar **42** are plural, cylindrical sockets **99** (see FIGS. **2** and **3**) sized appropriately to receive the latch pins, **76a**, that are present in anti-rotation latch-pin structures **76**. In the collar structure which is now being described, sockets **99**, of which there are eight in all, are located (as mentioned earlier herein) at 45-degree angular intervals around the collar, although only four of them, at 90-degree, quadrature intervals (and two of them only at a time —at 180-degree intervals) are employed specifically during welding assembly of a box column to effect anti-rotation locking of a collar, and thus rotational stabilizing of a received and held box-column pre-assembly. The additional sockets are only tangential to the present invention. They are provided, for example, simply as a special convenience to enable support apparatus **20**, if desired, to be employed, in a modified manner not involving the present invention, to assist in column-angular-rotational-position weld-attaching of various, potentially to be employed, external, column-side components, such as the two, different styles of column-to-beam, interconnect-promoting components illustrated, described, and discussed as being weld-attachment-handled, in the structural building frame environments described in U.S. Pat. Nos. 7,621,099, and 7,941,985, the entire disclosure contents of which patents are hereby incorporated herein by reference.

Completing a description of rotational support structure **34**, included, as has been mentioned, within this structure, for removable fitment and attachment by previously identified, manually manipulable detent pins **51**, adjacent the obtuse-angle sides, **44c**, **44d** of, and within, collar-defined, non-rectangular throughpassage **44**, are the two, previously mentioned, double-wedge clamping shoes **48**, **50**. The common configurations of these two clamping shoes, and their sizes relative to the sizes of these obtuse-angle throughpassage sides, are quite evident from the drawings.

When these two shoes are appropriately “pinned” in place by detent pins **51** within throughpassage **44**, individually to each of collar sections **84**, **86**, they define, collectively with straight-angle sides **44a**, **44b** in the throughpassage, the previously mentioned, generally square-cross-section capturing and confining window **53**, one defined corner in which, as was earlier pointed out, is marked **53** in FIG. **2**, for stably supporting, with slight clamping pressure, a box-column pre-assembly which extends through this window. The square cross-section window thus present is defined, very specifically, by the inwardly facing (generally toward rotational-assembly axis **32**), small, flat surfaces (previously mentioned) included in projections **46** provided in the two collar sections, and in projections **52** provided in the shoes.

When the shoes are disengaged from the throughpassage, such being enabled by, removal of detent pins **51**, their disengagement exposes the full lateral dimensions of the previously mentioned wedge shaped troughs **47** to allow for easy insertion of a box-column pre-assembly, and later removal of a finished and finally fully weld-assembled box column. Attaching of these shoes to the collar sections in the collar via pins **51** takes place via insertion of these pins alignedly through previously mentioned throughbores **96** (see again particularly FIG. **5**) provided in the collar sections, and through the throughbores pictured (but not specifically labeled) in the illustrated, short, laterally outwardly extending tabs that are seen (particularly in FIGS. **2**, **5** and **6**) attached to shoes **48**, **50**.

Describing now typical preparation and use of the apparatus of the invention, such as apparatus **20**, a decision is first made regarding the size and cross-sectional character of a box column which is to be assembled. For example, where the

## 12

intended box-column is to be typical of those that are employed in the most usual structural building frames, it will have (1) a square cross section of certain, predetermined, outside, lateral transverse dimensions, such as the 16-inch dimension mentioned earlier herein, and (2) a certain length, such as the earlier-mentioned 60-foot length. With respect to the intended, box-column, cross-sectional configuration, it will, of course, be important that the troughs **47** that are formed in the rotational-support-structure collars in apparatus **20** be shaped appropriately so that when they (the troughs) are upwardly facing and open, (a) they will each make a presentation like that which is shown in FIG. **1** for the there pictured, lower collar section of the collar in rotational support structure **36**, and in FIG. **6** for the single trough **47** seen in this figure, and (b) will possess a lateral width effectively between their angularly outwardly splayed, opposite, obtuse-angle sides which will readily and freely accommodate easy placement of a box-column pre-assembly in them. Such “formation” of the collars to accommodate a particular style (i.e., cross section) of an intended box column and its associated pre-assembly is referred to hereinbelow as “collar sizing”.

The frame in apparatus **20**, naturally, must have an appropriate length, as must also the travel trackage provided along the frame for the traveling welding instrumentality which, initially, i.e., before the start of a weld-assembling operation, will be located appropriately adjacent one end of the apparatus frame, such as frame **28**.

As was mentioned earlier herein, and as has just been suggested with respect to preliminary choices, it will usually be the case that an intended-to-be-assembled box column will have a square cross section, such as the square cross section which is shown herein for representative box column **22**. If some special, cross-sectional rectangular shape which is non-square is to be assembled, the to-be-employed troughs’ lateral dimensions will preferably be chosen to have widths slightly greater than the larger of the two lateral cross-sectional dimensions of such a column.

Another preliminary consideration involves determining where, and with what intervals, along the length of the apparatus frame, such as frame **28**, to position, and then anchor in place, the rotational support assemblies (at least two) that are to be used.

With these preliminary apparatus-preparations taken into account, “correctly collar-sized” rotational support structures, in the selected number of them that are to be used, are mounted on the frame at the selected interval locations therealong, and the yokes and collars in all are opened, with the collars arranged so that their respective, “remaining-in-place”, lower collar sections are disposed with troughs **47** facing straight up—open and exposed. All clamping shoes are removed so as fully to expose the splayed, angular widths of the troughs. The anti-rotation latch-pin structures are operated to lock the lower collar sections against rotation in the lower yoke sections.

A box-column pre-assembly, of the appropriate size is lowered into the upwardly facing, open troughs, preferably initially with a pair of seams **26** facing upwardly as in FIGS. **1** and **2**, and the clamping shoes are returned, and initially partially reattached by detent pinning to the lower collar sections.

The presences of these now reattached clamping shoes, even without the presences yet of the upper collar sections and the upper yoke sections, furnish slight lateral clamping pressure on opposite lateral sides of a received box-column pre-assembly, and thus introduce desired lateral stabilization for a so-received pre-assembly.

Even now, without reclosing of the rotational support structures by reconnecting the upper collar sections and the upper yoke sections, and if it is desired that a welding-assembly operation take place under these circumstances, this is clearly one useful mode of implementing the supporting capability of apparatus 20. In other words, at this point in time, and with all of the yokes completely open, welding instrumentality 54 may now readily be advanced along the length of apparatus 20, with travel of this instrumentality, and operating of its two welding heads simultaneously, being suitably under the control of computer 62 to produce full-strength welds continuously in seams 26, and in an unobstructed manner respecting progress of the instrumentality along the box-column preassembly

Another approach, of course, is for the rotational support structures, except perhaps that one which is most closely adjacent the beginning location of the welding instrumentality, to be closed initially to enhance stable holding of a box-column pre-assembly, with the welding instrumentality then advanced, again in a generally continuous manner along the length of the apparatus, with the appropriate, nearby rotational support structure opened at the right time as the welding instrumentality approaches the location of that structure. This practice might also involve not only successive, seriatim openings of rotational support structures, but successive, seriatim closures of rotational support structures which have just been passed by the welding instrumentality.

If it turns out that a box-column pre-assembly has initially been lowered into position in the troughs under circumstances where two seams 26 are not upwardly facing, then a typical practice will involve closure of all of the collars and yokes, and thus all of the rotational support structures, before any welding activity takes place, with the then completely length-supported preassembly first rotated about assembly-axis 32, and thus about its own long axis 22e, 90-degrees so as properly to orient such seams as a necessary precursor for the beginning of welding assembly.

When a complete, initial, singular, welding pass has been accomplished, typically (though not necessarily) all, or at least user-selected, appropriate ones, of the yokes and collars will be closed to provide stable support for the still not yet complete box-column, and the entire pre-assembly will then be rotated 180-degrees about axes 22e, 32. This is done in apparatus 20 by a hand implemented rotational operation, of course, after freeing, by operations of latch-pin structures 76, of all of the collars for free rotation in the collar reception zones in the yokes, to the appropriate, new, 180-degree-adjusted, angular disposition about axis 32. In this new condition, anti-rotation latching again of the collars takes place to re-stabilize, against inadvertent rotation, the pre-assembly in its new angular orientation. This new angular orientation is one, of course, which exposes, upwardly for longitudinal welding, the opposite pair of seams 26 in the box-column pre-assembly.

When the seams in this new, second pair of seams have been welded, a completed box column is done, and FIG. 7 in the drawings shows such completion for box column 22 which has "emerged" from its precursor box-column pre-assembly 22. The four, full-strength finishing welds in seams 26 are shown here at 102.

The apparatus of the present invention is thus now fully described and illustrated, and several ways in which it may be used have also been discussed. While all of this is the case, I recognize that other variations and modifications, in both apparatus structure, and in its use, may come to the minds of those skilled in the relevant art, and it is my intention that the

appended claims to invention will be interpreted with scopes which cover all such perceived variations and modifications.

I claim:

1. Apparatus for promoting the weld assembling of an elongate box-column from a rectangular-cross-section pre-assembly of elongate, adjacent, planar plate components having a long, central axis which is to become the long, central axis of a finally assembled box column, said apparatus comprising

an elongate, substantially horizontal frame possessing a long axis

an elongate, substantially horizontal, rotational-assembly axis operatively associated with and disposed above said frame,

at least a pair of pre-assembly rotational support structures mounted at spaced locations on said frame designed to receive, and to furnish support for rotation about said rotational-assembly axis for, such the pre-assembly, each support structure including, operatively centered on said rotational-assembly axis,

(a) an openable and closable, dual-section, split-structure yoke defining an openable and closable collar-reception zone which, with the yoke closed, is circular in configuration,

(b) an openable and closable, dual-section, split-structure collar, which is circular in perimetral outline when closed, and removably receivable, and rotatable effectively, within said collar-reception zone, said collar, when closed, possessing a central, non-rectangular throughpassage defined by a first pair of opposite, straight-angle sides, and a second pair of opposite, outwardly-directed-obtuse-angle sides, opening of a collar splitting its throughpassage, along a line connecting the vertices of its obtuse-angle sides, into two, equal and matching-configuration, wedge-shaped troughs, and

(c) a pair of removably collar-attachable, double-wedge clamping shoes, one for each obtuse-angle side of said throughpassage, said shoes, when attached to the collar, and with the collar closed, forming, in cooperation with said throughpassage's straight-angle sides, a rectangular-outline window for confinedly, and complementarily, receiving extension therethrough of the rectangular cross section of the box-column pre-assembly in a condition with the pre-assembly's long, central axis substantially coincident with said rotational-assembly axis.

2. The apparatus of claim 1 which more specifically is for promoting the weld assembling of the box-column from the pre-assembly of elongate, planar plate components having long, lateral edges, pairs of which edges, respecting adjacent plate components in the pre-assembly, lie parallel and adjacent one another to define, collectively in the pre-assembly, plural, elongate, parallel, inter-plate-component, weld-awaiting interface seams, and wherein said yokes and collars are respectively configured whereby opening of said yokes and collars is effective to expose, in a manner facing upwardly to accommodate welding access, a pair of such seams.

3. The apparatus of claim 2, wherein each section in each yoke and in each collar is generally arcuate and semicircular in configuration, and each yoke and collar is structured to promote cooperative openings thereof about a substantially horizontal plane disposed above said frame.

4. The apparatus of claim 2 which further comprises, operatively associated with said frame, a traveling welding instrumentality having a pair of laterally spaced welding heads disposed appropriately above the frame, and an elongate track supporting said instrumentality for movement along a travel path paralleling said rotational-assembly axis

15

and for thereby guiding said welding heads along laterally spaced welding paths that are disposed, respectively, immediately overhead, and parallel to, any open-yoke and open-collar, upwardly exposed interface seams in any pre-assembly then supported by said support structures.

5 5. The apparatus of claim 2 which is constructed in a manner whereby, with said shoes attached to an associated collar, opening of the collar and the associated yoke under, circumstances with the pre-assembly then supported by said support structures, is permissible without de-attaching the shoes from the collar.

6. The apparatus of claim 1, wherein said rotational support structures are repositionably mounted on said frame.

7. Apparatus for assisting in the final welding assembly of an elongate, square-cross-section, structural-building-frame box column from a box-column pre-assembly of elongate, adjacent, planar, plate components that are to form the sides of such a finally assembled box column, and where the pre-assembly has a square cross section which is to become that of the intended, finally assembled box column, and a long, central axis which is to become the long, central axis of such a finally assembled box column, said apparatus comprising

- an elongate, substantially horizontal frame,
- an elongate, substantially horizontal rotational-assembly axis disposed above, and associated operatively with, said frame,

plural, openable and closable, dual-section, split-structure yokes mounted on said frame at plural, spaced locations distributed therealong, each yoke defining an upright, openable and closable collar-reception zone which, with the yoke closed, is circular in configuration, and centered on said rotational-assembly axis,

for each yoke, an openable and closable, dual-section, split-structure collar, which is circular in perimetral outline when closed, and removably receivable, and rotatable about said rotational-assembly axis when received, effectively, within the yoke's associated collar-reception zone,

each collar, when closed, possessing a central, non-square, polygonal throughpassage defined by a first pair of opposite, straight-angle sides, and a second pair of opposite, outwardly directed, obtuse-angle sides, opening of a collar splitting its throughpassage, effectively along a line connecting the vertices of its obtuse-angle sides, into two, equal and matching-configuration, wedge-shaped troughs, each throughpassage being centered on said rotational-assembly axis under circumstances with its associated collar closed, and disposed for rotation about the rotational-assembly axis, and

for the obtuse-angle sides associated with the throughpassage in each collar, a pair of removably collar-attach-

16

able, double-wedge clamping shoes, one for each obtuse-angle side of the throughpassage, said shoes, when attached to the associated collar, and with the collar closed, forming, in cooperation with said straight-angle sides of said throughpassage, a square-outline window for confinedly, and essentially complementarily, receiving extension therethrough of the square cross section of the box-column pre-assembly,

the box-column pre-assembly, when so received by said throughpassages in said collars, being disposed for rotation about said rotational-assembly axis in a condition with its associated long, central axis being substantially coincident with the rotational-assembly axis.

8. The apparatus of claim 7 which more specifically is for promoting the weld assembling of the box-column from the pre-assembly of elongate, planar plate components having long, lateral edges, pairs of which edges, respecting adjacent plate components in the pre-assembly, lie parallel and adjacent one another to define, collectively in the pre-assembly, plural, elongate, parallel, inter-plate-component, weld-awaiting interface seams, and wherein said yokes and collars are respectively configured whereby opening of said yokes and collars is effective to expose, in a manner facing upwardly to accommodate welding access, a pair of such seams.

9. The apparatus of claim 8, wherein each section in each yoke and in each collar is generally arcuate and semicircular in configuration, and each yoke and collar is structured to promote cooperative openings thereof about a substantially horizontal plane disposed above said frame.

10. The apparatus of claim 8 which further comprises, operatively associated with said frame, a traveling welding instrumentality having a pair of laterally spaced welding heads disposed appropriately above the frame, and an elongate track supporting said instrumentality for movement along a travel path paralleling said rotational-assembly axis and for thereby guiding said welding heads along laterally spaced welding paths that are disposed, respectively, immediately overhead, and parallel to, any open-yoke and open-collar, upwardly exposed interface seams in any pre-assembly then supported by said support structures.

11. The apparatus of claim 8 which is constructed in a manner whereby, with said shoes attached to an associated collar, opening of the collar and the associated yoke under, circumstances with the pre-assembly then supported by said support structures, is permissible without de-attaching the shoes from the collar.

12. The apparatus of claim 7, wherein said rotational support structures are repositionably mounted on said frame.

\* \* \* \* \*